



DROP-N-LOCK® BRACKET SYSTEM




MADE IN THE USA

A FAST AND FLEXIBLE TWO-POINT FASTENING SYSTEM WITH QUICK ACCESS FOR MAINTENANCE

- ▶ **FAST INSTALL**
With very few components, Drop-N-Lock® can be quickly and easily installed.
- ▶ **HASSLE-FREE REPAIR & MAINTENANCE**
Drop-N-Lock® is easily dismounted with one tool, allowing quick access for repairs and maintenance.
- ▶ **IN STOCK**
We keep a large stock of our standard components in-house to ensure quick shipping for your urgent safety needs.
- ▶ **MEETS SAFETY STANDARDS**
The Drop-N-Lock® system meets all relevant OSHA, ANSI/RIA CSA and ISO safety standards.

Drop-N-Lock® provides versatility and ease for the installation and maintenance of Saf-T-Fence® Machine Guarding. This easy-to-use bracket system allows for quick configuration and removal, substantially saving on installation and maintenance costs. Offered in a wide array of panel sizes, door options and locking hardware, Drop-N-Lock® can cover nearly every requirement.

To install the Drop-N-Lock® Bracket System, simply drop the panels into the post brackets and lock it into place with simple tightening. When maintenance workers need access, you can quickly remove the panel from the posts and the bracket system will stay attached to prevent any misplaced hardware.

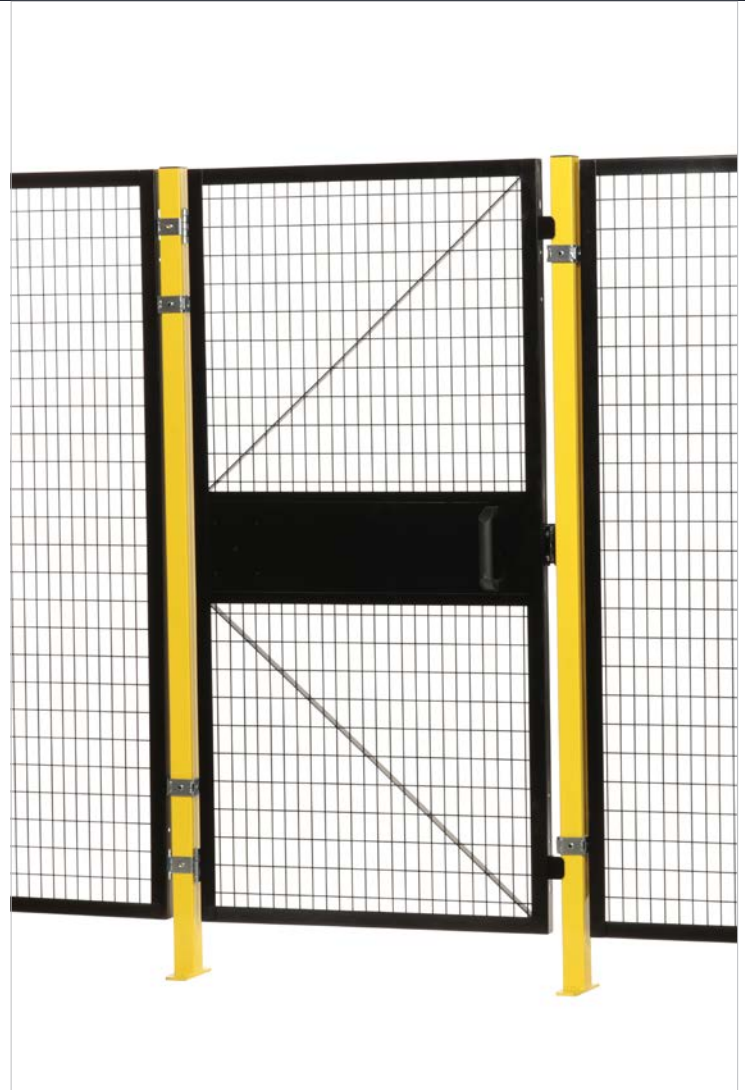

Panels easily lock in place with bracket



Use two brackets for corner installation



DROP-N-LOCK[®] BRACKET SYSTEM



MADE IN THE USA

6' HIGH SYSTEM

6' High Post | 67" High Panels | 67" High Doors
Built-in Door Catch & Pull Handle
5" Sweep Space

PART No.	WIDTH	WEIGHT
Posts – End & Line (HD with 6" x 6" Baseplate)		
DNL-P72-EL	2"	11 lbs.
DNL-P72-EL-HD	2"	12 lbs.
Posts – Corner, 3-Way & 4-Way (HD with 6" x 6" Baseplate)		
DNL-P72-C34	2"	12 lbs.
DNL-P72-C34-HD	2"	13 lbs.
Panels**		
DNL-1067	10"	12 lbs.
DNL-1667	16"	14 lbs.
DNL-1967	19"	16 lbs.
DNL-2267	22"	18 lbs.
DNL-2867	28"	21 lbs.
DNL-3467	34"	23 lbs.
DNL-4667	46"	28 lbs.
DNL-5867	58"	33 lbs.
Hinge Door		
DNL-H3467-SL	34"	34 lbs.
DNL-H4667-SL	46"	42 lbs.
Hinge Pair Door		
DNL-HP7067-SL	70"	82 lbs.
DNL-HP9467-SL	94"	100 lbs.
Clear Access Slide Door*		
DNL-SC3467-SL	34"	105 lbs.
DNL-SC4667-SL	46"	117 lbs.
Clear Access Slide Pair Door*		
DNL-SPC7067-SL	70"	205 lbs.
DNL-SPC9467-SL	94"	205 lbs.

*Note: Actual sliding door exceeds opening width.
Please consult factory for exact dimension.

**Note: Panels measure 1" smaller in width to
compensate for bracket spacing.

OPTIONS

PART No.	DESCRIPTION	WEIGHT
DNL-INT1	Interlock for Hinge Door w/ Plastic Body	4 lbs.
DNL-INT2	Interlock for Slide Door w/ Plastic Body	4 lbs.
DNL-INT3	Locking Interlock for Hinge Door w/ Plastic Body	4 lbs.
DNL-INT4	Locking Interlock for Slide Door w/ Plastic Body	4 lbs.
DNL-INT5	Interlock for Hinge Door w/ Metal Body	6 lbs.
DNL-INT6	Interlock for Slide Door w/ Metal Body	6 lbs.
DNL-INT7	Locking Interlock for Hinge Door w/ Metal Body	6 lbs.
DNL-INT8	Locking Interlock for Slide Door w/ Metal Body	6 lbs.
DNL-HK02	Angle Kit	2 lbs.
DNL-PK	Convertor Kit for End/Line to Corner/3-Way	2 lbs.
DNL-PNL	Panel Hardware Kit	1 lbs.
DNL-HPAD	Hinge Door/Hinge Pair Door Padlock Kit	2 lbs.
DNL-34HBE	34" Header Bar w/ 24" Vertical Extensions	14 lbs.
DNL-46HBE	46" Header Bar w/ 24" Vertical Extensions	16 lbs.
DNL-58HBE	58" Header Bar w/ 24" Vertical Extensions	17 lbs.
DNL-70HBE	70" Header Bar w/ 24" Vertical Extensions	19 lbs.
DNL-94HBE	94" Header Bar w/ 24" Vertical Extensions	21 lbs.
DNL-118HBE	118" Header Bar w/ 24" Vertical Extensions	24 lbs.
DNL-191	Spacer Tool for Bracket Place	1 lbs.

LOCKING OPTIONS

	Door Type			
	H	HP	CS	CSP
Snap Lock	✓	✓	✓	✓
Cylinder Lock (Key Lock Not Included)	✓	✓	✓	✓
Keyed Alike Cylinders	✓	✓	✓	✓
Keyed Different Cylinders	✓	✓	✓	✓
Safety Switch with Slide Bolt Actuator	✓	✓	✓	✓
Locking Safety Switch with Slide Bolt Actuator	✓	✓	✓	✓

SPECIFICATIONS

Panels / Doors	
Frame	14-gauge 1 1/2" x 1 1/2"
Wire	10-gauge welded
Grid Opening	1 1/4" x 2 1/2"
Posts	
Tube	2" x 2", 16-gauge
Foot Plate	6" x 2" x 1/4"
General	
Finish	Powder Coated
Warranty	1 Year



Snap Lock



Cylinder Lock



Safety Switch (Multiple Options Available)